

**Duct/Immersion sensor Temperature**

Active sensor (4...20 mA) for measuring temperature in duct applications. In combination with a stainless steel or brass thermowell also applicable for pipe applications. IP65 / NEMA 4X rated enclosure.


**Type Overview**

| Type     | Output signal active temperature | Probe length | Probe diameter |
|----------|----------------------------------|--------------|----------------|
| 22DT-14H | 4...20 mA                        | 50 mm        | 6 mm           |
| 22DT-14L | 4...20 mA                        | 100 mm       | 6 mm           |
| 22DT-14N | 4...20 mA                        | 150 mm       | 6 mm           |
| 22DT-14P | 4...20 mA                        | 200 mm       | 6 mm           |
| 22DT-14R | 4...20 mA                        | 300 mm       | 6 mm           |
| 22DT-14T | 4...20 mA                        | 450 mm       | 6 mm           |

**Technical Data**

|                        |                                   |  |            |            |                 |
|------------------------|-----------------------------------|--|------------|------------|-----------------|
| <b>Electrical data</b> | Nominal voltage                   | DC 24 V  |            |            |                 |
|                        | Nominal voltage range             | DC 13.5...26.4 V   |            |            |                 |
|                        | Power consumption DC              | 0.5 W  |            |            |                 |
|                        | Electrical connection             | Pluggable spring loaded terminal block max. 2.5 mm <sup>2</sup>  |            |            |                 |
|                        | Cable entry                       | Cable gland with strain relief Ø6...8 mm   |            |            |                 |
| <b>Functional data</b> | Sensor Technology                 | Based on Pt1000 1/3 DIN  |            |            |                 |
|                        | Application                       | Air<br>Water   |            |            |                 |
|                        | Multirange                        | 8 measuring ranges selectable  |            |            |                 |
|                        | Current output                    | 1x 4...20 mA, max. load 500 Ω  |            |            |                 |
| <b>Measuring data</b>  | Measured values                   | Temperature  |            |            |                 |
|                        | Measuring range temperature       | Active sensor: range selectable<br>Attention: max. measuring temperature is restricted by max. fluid temperature (see Safety data) |            |            |                 |
|                        |                                   | Setting  | range [°C] | range [°F] | Factory setting |
|                        |                                   | S0   | -50...50   | -30...130  |                 |
|                        |                                   | S1   | -10...120  | 0...250    |                 |
|                        |                                   | S2   | 0...50     | 40...140   |                 |
|                        |                                   | S3   | 0...250    | 30...480   |                 |
|                        |                                   | S4   | -15...35   | 0...100    |                 |
|                        |                                   | S5   | 0...100    | 40...240   |                 |
|                        |                                   | S6   | -20...80   | 40...90    |                 |
|                        | S7                                | 0...160  | 0...150    | ✓          |                 |
|                        | Accuracy temperature active       | ±0.5°C @ 21°C [±0.9°F @ 70°F]  |            |            |                 |
|                        | Long-term stability               | ±0.04°C p.a. @ 21°C [±0.07°F p.a. @ 70°F]  |            |            |                 |
|                        | Time constant τ (63%) in air duct | Typical 46 s @ 3 m/s<br>Typical 210 s @ 0 m/s  |            |            |                 |

|                              |  |  |
|------------------------------|--|--|
| <b>Measuring data</b>        | Time constant $\tau$ (63%) in water pipe | Typical 7 s with thermowell brass<br>Typical 9 s with thermowell stainless steel |
|                              | <hr/>                                    |  |
| <b>Materials</b>             | Cable gland                              | PA6, black   |
|                              | Housing                                  | Cover: PC, orange<br>Bottom: PC, orange<br>Seal: NBR70, black<br>UV resistant    |
|                              | Probe material                           | V4A (1.4404)   |
| <hr/>                        |  |  |
| <b>Safety data</b>           | Ambient humidity                         | Max. 95% RH, non-condensing  |
|                              | Ambient temperature                      | -35...50°C [-30...120°F]   |
|                              | Fluid temperature                        | -50...160°C [-60...320°F]  |
|                              | Housing surface temperature              | Max. 70°C [160°F]  |
|                              | Protection class IEC/EN                  | III, Protective Extra-Low Voltage (PELV)   |
|                              | Power source UL                          | Class 2 Supply   |
|                              | EU Conformity                            | CE Marking   |
|                              | Certification IEC/EN                     | IEC/EN 60730-1   |
|                              | Certification UL                         | cULus acc. to UL60730-1A/-2-9, CAN/CSA E60730-1/-2-9                             |
|                              | Degree of protection IEC/EN              | IP65   |
|                              | Degree of protection NEMA/UL             | NEMA 4X  |
|                              | Enclosure                                | UL Enclosure Type 4X   |
|                              | Quality Standard                         | ISO 9001   |
|                              | Mode of operation                        | Type 1   |
|                              | Pollution degree                         | 3  |
| Rated impulse voltage supply | 0.8 kV                                   |  |
| Construction                 | Independently mounted control            |  |

**Safety notes**


This device has been designed for use in stationary heating, ventilation and air-conditioning systems and must not be used outside the specified field of application. Unauthorised modifications are prohibited. The product must not be used in relation with any equipment that in case of a failure may threaten humans, animals or assets.

Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied during installation.

The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.

**Remarks**

**General remarks concerning sensors** When using lengthy connection wires (depending on the cross section used) the measuring result might be falsified due to a voltage drop at the common GND-wire (caused by the voltage current and the line resistance). In this case, 2 GND-wires must be wired to the sensor - one for supply voltage and one for the measuring current.

Sensing devices with a transducer should always be operated in the middle of the measuring range to avoid deviations at the measuring end points. The ambient temperature of transducer electronics should be kept constant. The transducers must be operated at a constant supply voltage ( $\pm 0.2$  V). When switching the supply voltage on/off, onsite power surges must be avoided.

**Build-up of Self-Heating by Electrical Dissipative Power**

Temperature sensors with electronic components always have a dissipative power which affects the temperature measurement of the ambient air. The dissipation in active temperature sensors shows a linear increase with rising operating voltage. The dissipative power should be taken into account when measuring temperature. In case of a fixed operating voltage ( $\pm 0.2$  V) this is normally done by adding or reducing a constant offset value. As Belimo transducers work with a variable operating voltage, only one operating voltage can be taken into consideration, for reasons of production engineering. Transducers 0...10 V / 4...20 mA have a standard setting at an operating voltage of DC 24 V. That means, that at this voltage, the expected measuring error of the output signal will be the least. For other operating voltages, the offset error will be increased by a changing power loss of the sensor electronics.

If a readjustment directly at the active sensor should be necessary during later operation, this can be done with the following adjustment methods.

- For sensors with NFC or dongle by the corresponding Belimo app
- For sensors with a trimming potentiometer on the sensor board
- For bus sensors via bus interface with a corresponding software variable


**Scope of delivery**

| Scope of delivery | Description                                  | Type      |
|-------------------|--|-----------|
|                   | Mounting clip, with screws and adhesive foil | A-22D-A11 |

**Accessories**

| Optional accessories          | Description  | Type        |
|-------------------------------|--|-------------|
|                               | Mounting plate S housing   | A-22D-A09   |
|                               | Connection adapter, M20x1.5, for cable 1x6 mm, Multipack 10 pcs.                           | A-22G-A01.1 |
| Optional accessories air      | Description  | Type        |
|                               | Mounting flange for sensor probe 6 mm, up to max. 120°C [248°F], Plastic                   | A-22D-A03   |
|                               | Mounting flange for sensor probe 6 mm, up to max. 260°C, Brass                             | A-22D-A05   |
| Recommended accessories water | Description  | Type        |
|                               | Thermowell pocket Stainless steel, 50 mm, G1/2", SW27                                      | A-22P-A06   |
|                               | Thermowell pocket Stainless steel, 100 mm, G1/2", SW27                                     | A-22P-A08   |
|                               | Thermowell pocket Stainless steel, 150 mm, G1/2", SW27                                     | A-22P-A10   |
|                               | Thermowell pocket Stainless steel, 200 mm, G1/2", SW27                                     | A-22P-A12   |
|                               | Thermowell pocket Stainless steel, 300 mm, G1/2", SW27                                     | A-22P-A14   |
|                               | Thermowell pocket Stainless steel, 450 mm, G1/2", SW27                                     | A-22P-A16   |
|                               | Thermowell pocket Brass, 50 mm, R1/2", SW22  | A-22P-A18   |
|                               | Thermowell pocket Brass, 100 mm, R1/2", SW22   | A-22P-A20   |
|                               | Thermowell pocket Brass, 150 mm, R1/2", SW22   | A-22P-A22   |
|                               | Thermowell pocket Brass, 200 mm, R1/2", SW22   | A-22P-A24   |
|                               | Thermowell pocket Brass, 300 mm, R1/2", SW22   | A-22P-A26   |
|                               | Thermowell pocket Brass, 450 mm, R1/2", SW22   | A-22P-A28   |
|                               | Syringe with thermal paste   | A-22P-A44   |
|                               | Compression fitting, Stainless steel, G 1/4" (external thread) for 6 mm, with cutting ring | A-22P-A45   |
|                               | Cold barrier, Plastic, L 50 mm, for thermowell A-22P-A..                                   | A-22P-A51   |


Wiring diagram

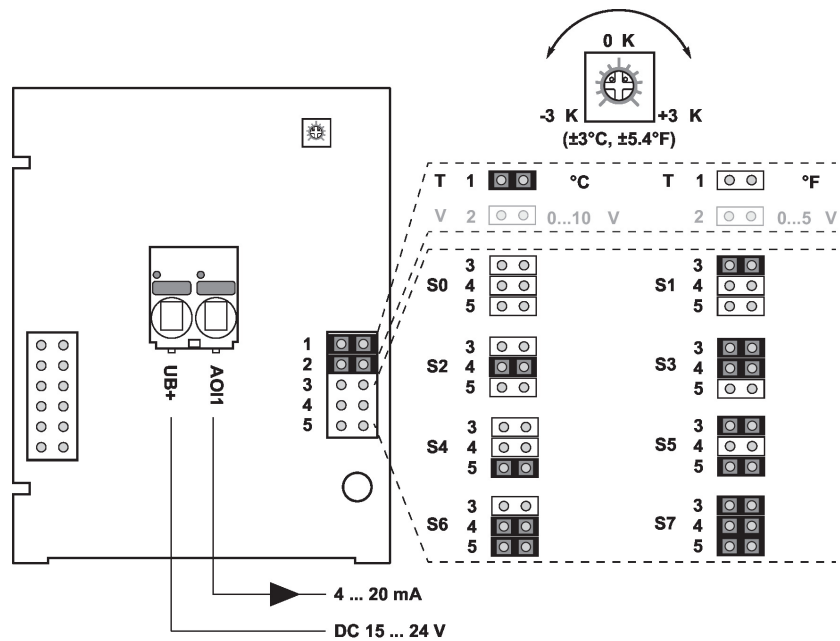

The adjustment of the measuring ranges is made by changing the bonding jumpers. The output value in the new measuring range is available after 2 seconds.

| Setting | range [°C] | range [°F] | Factory setting |
|---------|------------|------------|-----------------|
| S0      | -50...50   | -30...130  |                 |
| S1      | -10...120  | 0...250    |                 |
| S2      | 0...50     | 40...140   |                 |
| S3      | 0...250    | 30...480   |                 |
| S4      | -15...35   | 0...100    |                 |
| S5      | 0...100    | 40...240   |                 |
| S6      | -20...80   | 40...90    |                 |
| S7      | 0...160    | 0...150    | ✓               |

Dimensions

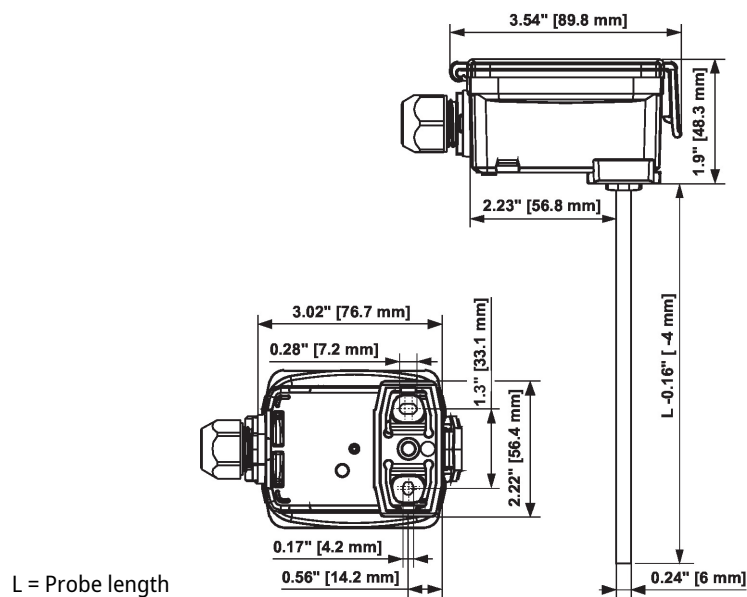

L = Probe length

| Type     | Probe length | Weight  |
|----------|--------------|---------|
| 22DT-14H | 50 mm        | 0.12 kg |
| 22DT-14L | 100 mm       | 0.13 kg |

| Type     | Probe length | Weight  |
|----------|--------------|---------|
| 22DT-14N | 150 mm       | 0.13 kg |
| 22DT-14P | 200 mm       | 0.14 kg |
| 22DT-14R | 300 mm       | 0.15 kg |
| 22DT-14T | 450 mm       | 0.16 kg |