


Differential pressure sensor Water

Active sensor (4...20 mA) for differential pressure measurement in HVAC systems. The sensor is suitable for water and water/glycol mixtures. The housing is made of stainless steel and is IP65 / NEMA 4 rated. Optional stainless steel or brass pipe connection adaptors also available.

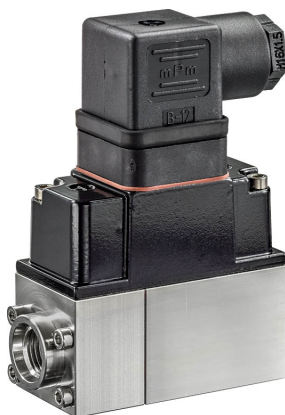

Type Overview

Type	Measuring range pressure [bar]	Output signal active pressure	Overpressure range	Overpressure range note	Burst pressure
22WDP-131	0...1	4...20 mA	6 bar	Single-sided	21 bar
22WDP-132	0...2.5	4...20 mA	6 bar	Single-sided	21 bar
22WDP-134	0...4	4...20 mA	16 bar	Single-sided	21 bar
22WDP-135	0...6	4...20 mA	16 bar	Single-sided	21 bar

Technical Data

Electrical data	Nominal voltage	DC 24 V
	Nominal voltage range	DC 13.5...26.4 V
	Power consumption DC	0.5 W
	Electrical connection	Connector plug for wire 0.5...1.5 mm ²
	Cable entry	Angle plug according to DIN 43650, construction A
Functional data	Current output	1x 4...20 mA, max. load 900 Ω
	Mechanical connection	pressure connector: G 1/4"
	Mounting	installation position unrestricted
	Application	Water Water glycol mixture
	Response time	37 ms
Measuring data	Measuring values	Differential pressure
	Accuracy pressure	<±1% of measuring range (@ -5...75°C)
	Long-term stability	±2.5% / 10 yr.
Materials	Housing seal	EPDM
	Housing	Bottom Part: Stainless steel 1.4305 Top Cover: Die cast aluminium
	Fluid wetted parts	Stainless steel 1.4301, Ceramic
Safety data	Ambient humidity	Max. 95% r.H., non-condensing
	Ambient temperature	-10...50°C [15...120°F]
	Fluid temperature	-10...80°C [15...175°F]
	Protection class IEC/EN	III Protective extra-low voltage (PELV)
	Protection class UL	UL Class 2 Supply
	EU Conformity	CE Marking
	Certification IEC/EN	IEC/EN 60730-1
	Degree of protection IEC/EN	IP65
	Degree of protection NEMA/UL	NEMA 4
	Quality Standard	ISO 9001

Safety notes



This device has been designed for use in stationary heating, ventilation and air-conditioning systems and must not be used outside the specified field of application. Unauthorised modifications are prohibited. The product must not be used in relation with any equipment that in case of a failure may threaten humans, animals or assets.

Ensure all power is disconnected before installing. Do not connect to live/operating equipment.


Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied during installation.

The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.


Accessories

Optional accessories	Description	Type
	Pipe connector, Brass, Pipe 6 mm to G 1/4" (external thread), Set of 2 pcs.	A-22WP-A04
	Pipe connector, Stainless steel, Pipe 6 mm to G 1/4" (external thread), Set of 2 pcs.	A-22WP-A06
	Pipe connector, Brass, Pipe 8 mm to G 1/4" (external thread), Set of 2 pcs.	A-22WP-A08
	Pipe connector, Stainless steel, Pipe 8 mm to G 1/4" (external thread), Set of 2 pcs.	A-22WP-A10
	Mounting bracket for 22WDP-..., Metal	A-22WP-A11

Wiring diagram

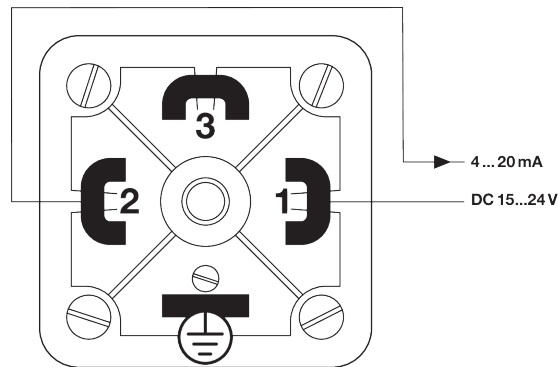

Dimensions

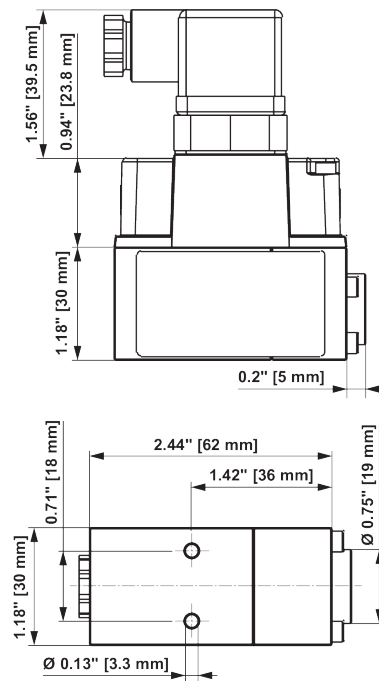

Type	Weight
22WDP-131	0.55 kg
22WDP-132	0.55 kg
22WDP-134	0.55 kg
22WDP-135	0.55 kg