

Retrofit rotary actuator for rotary valves and butterfly valves

Torque motor 20 Nm

- Nominal voltage AC/DC 24 V
- · Control Open/close





Technical data		
Electrical data	Nominal voltage	AC/DC 24 V
	Nominal voltage frequency	50/60 Hz
	Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V
	Power consumption in operation	5 W
	Power consumption in rest position	2.5 W
	Power consumption for wire sizing	7.5 VA
	Connection supply / control	Cable 1 m, 2 x 0.75 mm <sup>2</sup>
	Parallel operation	Yes (note the performance data)
Functional data	Torque motor	20 Nm
	Torque fail-safe	20 Nm
	Direction of motion fail-safe	selectable:
		Deenergised NC, valve closed $(A - AB = 0\%)$
		Deenergised NO, valve open $(A - AB = 100\%)$
	Manual override	by means of hand crank and locking switch
	Running time motor	75 s / 90°
	Running time fail-safe	<20 s / 90°
	Sound power level, motor	45 dB(A)
	Position indication	Mechanical
	Service life	Min. 60'000 fail-safe positions
Safety	Protection class IEC/EN	III Safety Extra-Low Voltage (SELV)
	Protection class UL	UL Class 2 Supply
	Degree of protection IEC/EN	IP54
	Degree of protection NEMA/UL	NEMA 2
	Enclosure	UL Enclosure Type 2
	EMC	CE according to 2014/30/EU
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
	Certification UL	cULus according to UL60730-1A, UL60730-2- 14 and CAN/CSA E60730-1:02
	Certification UL note	The UL marking on the actuator depends on the production site, the device is UL-compliant in any case
	Mode of operation	Type 1.AA
	Rated impulse voltage supply / control	0.8 kV
	Control pollution degree	3
	Ambient temperature	050°C
	Storage temperature	-4080°C
	Ambient humidity	Max. 95% r.H., non-condensing
	Servicing	maintenance-free
Mechanical data	Connection flange	F03/F04/F05
Weight	Weight	2.3 kg



### Safety notes



- This device has been designed for use in stationary heating, ventilation and airconditioning systems and must not be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- Outdoor application: only possible in case that no (sea) water, snow, ice, insolation
  or aggressive gases interfere directly with the actuator and that is ensured that the
  ambient conditions remain at any time within the thresholds according to the data
  sheet.
- Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied during installation.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- · Cables must not be removed from the device.
- The device contains electrical and electronic components and must not be disposed
  of as household refuse. All locally valid regulations and requirements must be
  observed.

# **Product features**

Mode of operation

The actuator moves the valve to the operating position at the same time as tensioning the return spring. The valve is turned back to the fail-safe position by spring force when the supply voltage is interrupted.

**Application** 

For rotary valves and butterfly valves with the following mechanical specifications:

Type

ZSFF-08

ZSFF-09

ZSFF-10

ZSFF-11

ZSFF-14

- ISO 5211: F03, F04, F05 (hole circle diameter on the flange for mounting the fitting)

s

[mm]

8

9

10

11

14

 $d_8$ 

[mm]

17

12

17

14

18

- ISO 5211: quadratic, flat head or wedge-shaped stem head geometry

#### Tappet shaft

ZSFV-..



ZSFF-..

[mm]

8

9

10

11

12

ZSFV-12

ZSFV-14



ZSFK-..



Туре	<b>d</b> 7 [mm]
ZSFK-12	12
ZSFK-14	14

Simple direct mounting

Simple direct mounting on the rotary valve or butterfly valve with mounting flange. The mounting orientation in relation to the fitting can be selected in 90° steps.

Manual override

By using the hand crank the valve can be operated manually and engaged with the locking switch at any position. Unlocking is carried out manually or automatically by applying the operating voltage.

Adjustable angle of rotation

High functional reliability

Adjustable angle of rotation with mechanical end stops.

The actuator is overload protected, requires no limit switches and automatically stops when the end stop is reached.

#### **Accessories**

#### Mechanical accessories

Description	Туре
Form fit adapter square 8x8x55 mm (LxWxH)	ZSFV-08
Form fit adapter square 9x9x55 mm (LxWxH)	ZSFV-09
Form fit adapter square 10x10x55 mm (LxWxH)	ZSFV-10
Form fit adapter square 11x11x55 mm (LxWxH)	ZSFV-11
Form fit adapter square 12x12x55 mm (LxWxH)	ZSFV-12
Form fit adapter square 14x14x55 mm (LxWxH)	ZSFV-14
Form fit adapter two flats 8xØ17x55 mm (WxØxH)	ZSFF-08
Form fit adapter two flats 9xØ12x55 mm (WxØxH)	ZSFF-09
Form fit adapter two flats 10xØ17x55 mm (WxØxH)	ZSFF-10
Form fit adapter two flats 11xØ14x55 mm (WxØxH)	ZSFF-11



# **Accessories**

Description	Туре
Form fit adapter two flats 14xØ18x55 mm (WxØxH)	ZSFF-14
Form fit adapter wedge groove Ø12x4x55 mm (ØxWxH)	ZSFK-12
Form fit adapter wedge groove Ø14x5x55 mm (ØxWxH)	ZSFK-14

# **Electrical installation**




### **Notes**

- · Connection via safety isolating transformer.
- Parallel connection of other actuators possible. Observe the performance data.

## Wiring diagrams

AC/DC 24 V, open/close




### Cable colours:

1 = black

2 = red

# Dimensions [mm]

## **Dimensional drawings**

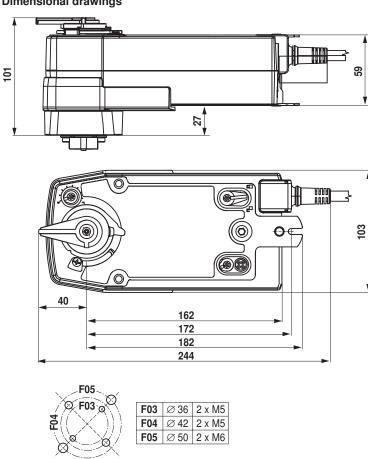



# **Further documentation**

General notes for project planning