

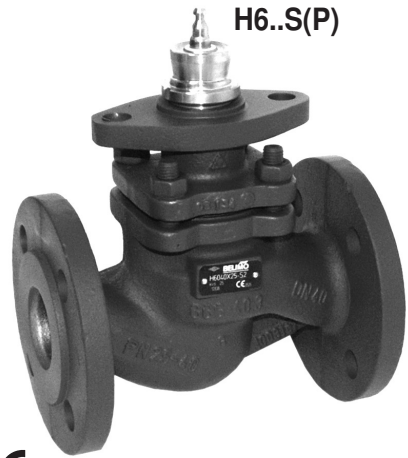


BELIMO
BELIMO Automation Ltd
Brunnenbachstrasse 1
8340 Hinwil
SWITZERLAND

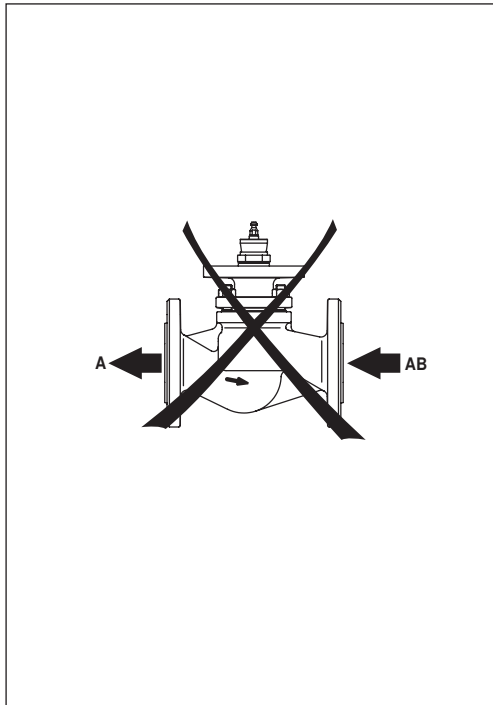


H6..S(P)

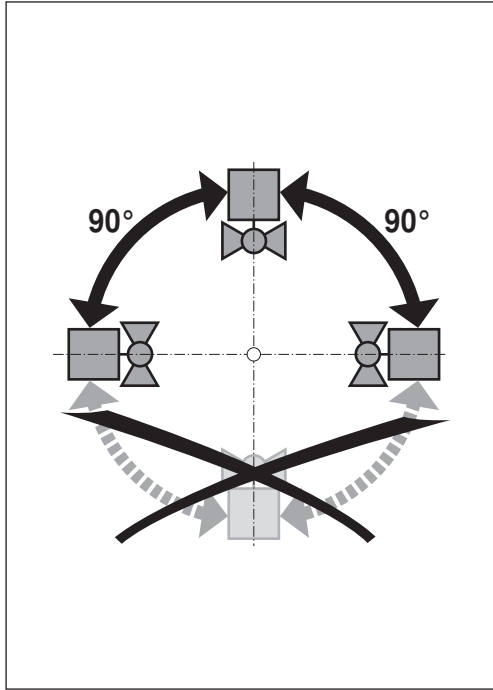

71557-00001.B



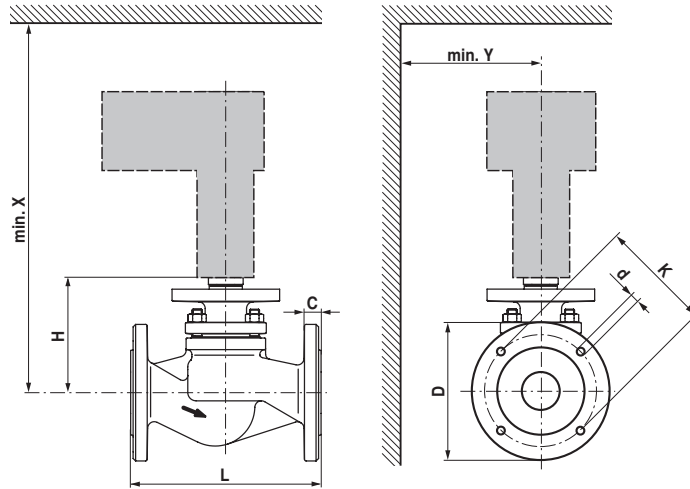

H6..S(P)

ps <1600 kPa (PN16) t= +5... +120°C ps <1400 kPa (PN16) t= +121... +150°C		H6..S	H6..SP	LV..A.. 500N		NV..A.. 1000N		SV..A.. 1500N		AV..A.. 2000N		EV..A 2500N		RV..A 4500N		L	H	D	K	d	C
DN	Hub / Stroke [mm]			Δps [kPa]	Δpmax [kPa]	Δps [kPa]	Δpmax [kPa]	Δps [kPa]	Δpmax [kPa]	Δps [kPa]	Δpmax [kPa]	Δps [kPa]	Δpmax [kPa]	Δps [kPa]	Δpmax [kPa]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
15	15	H610S ... 11S		1600	1000	1600	1000	1600	1000							130	118	95	65	4 x 14	14
15	15	H612S ... 15S		800	800	1600	1000	1600	1000							130	118	95	65	4 x 14	14
20	15	H619S ... 20S		800	800	1600	1000	1600	1600							150	118	105	75	4 x 14	16
25	15	H624S ... 25S		450	450	1300	1000	1600	1000							160	126	115	85	4 x 14	16
32	15	H632S		300	300	950	950	1550	1000							180	126	140	100	4 x 18	18
40	15	H640S		140	140	500	500	850	850							200	133	150	110	4 x 18	18
40	15		H640SP			1600	1000	1600	1000							200	136	150	110	4 x 18	18
50	15	H650S		60	60	300	300	500	500							230	139	165	125	4 x 18	20
50	15		H650SP			1600	1000	1600	1000							230	142	165	125	4 x 18	20
65	18	H664S				130	130	250	250							290	152	185	145	4 x 18	20
65	18		H664SP			1600	1000	1600	1000							290	155	185	145	4 x 18	20
65	30	H665S								400	400	550	550	1100	1000	290	155	185	145	4 x 18	20
80	18		H679SP			1600	1000	1600	1000							310	173	200	160	8 x 18	22
80	30	H680S								250	250	350	350	700	700	310	170	200	160	8 x 18	22
100	30	H6100S								150	150	200	200	450	450	350	190	220	180	8 x 18	24
100	30		H6100SP							600	600	600	600	600	600	350	193	220	180	8 x 18	24
125	40	H6125S										110	110	250	250	400	228	250	210	8 x 18	26
125	40		H6125SP									600	600	600	600	400	245	250	210	8 x 18	26
150	40	H6150S										70	70	180	180	480	288	285	240	8 x 22	26
150	40		H6150SP									600	600	600	600	480	306	285	240	8 x 22	26